



PRIMUS LINE® **WATER**

FEATURES

Outer layer: Abrasion-resistant PE sheath Reinforcement: Seamless aramid fibre (one- or two-layer) fabric Inner layer: Based on PE

APPLICATION


Pipeline rehabilitation made easy

Primus Line® is an innovative technology for the trenchless rehabilitation of pressure pipelines for different media such as water, gas and oil. The process is based on a flexible high-pressure pipe and a connection technology developed specifically for this system.

Primus Line® is suitable for the transportation of various liquids in the field of water and holds drinking water approvals in numerous countries.

The ideal flow characteristics caused by an extremely smooth inner coating and the optimised systems for high-, medium- and low-pressure requirements make Primus Line® an economical solution for the rehabilitation of ageing pipelines. Thus, water authorities and network operators benefit from reliable operation and a sustainable investment in their fixed assets.

> Primus Line connector with flange or welded end

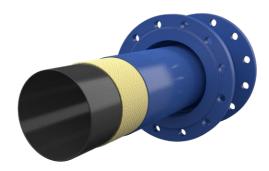

Factory-produced product


MOST SUITED ENVIRONMENTS

Pipelines often run through environments that are hard to access. Obstacles to an easy and fast rehabilitation of ageing pipes can be of geographical, economical, architectural or environmental nature.

Primus Line® easily overcomes those obstacles and is uniquely suited for projects in the following areas:

> Diameter between DN 150 and DN 500

> > **HOST PIPE**

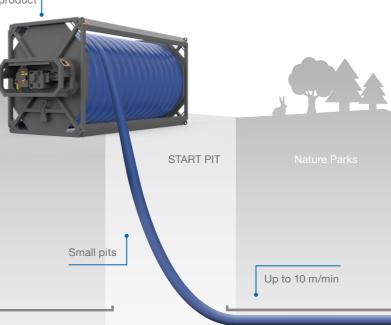



Save time and money!

- Installation speeds of up to 10 metres per minute
- Up to 2,500 metres per pull
- Quick re-commissioning for minimal time of service interruption
- Low pre-investment for installers

Simplify the engineering process!

- Installation through multiple bends of up to 45°
- Withstands thermal expansion of the host pipe and seismic movement
- Fully flexible seamlessly woven aramid fabric

Protect the environment and the neighbourhood!


- Minor installation footprint
- Small pits and reduction of road work
- Reduced use of machinery
- Decreased impact on traffic
- · Minimal disturbance of daily life around

Increase your pressure rates!

- Burst pressure rates up to 206 bar
- Operating pressure up to 82 bar
- Independent of host pipe

Extend the service life!

- 100% quality control during the manufacturing process and before shipping
- · No curing, steaming or adhesion process
- Independent of weather conditions during installation
- 50+-year lifetime

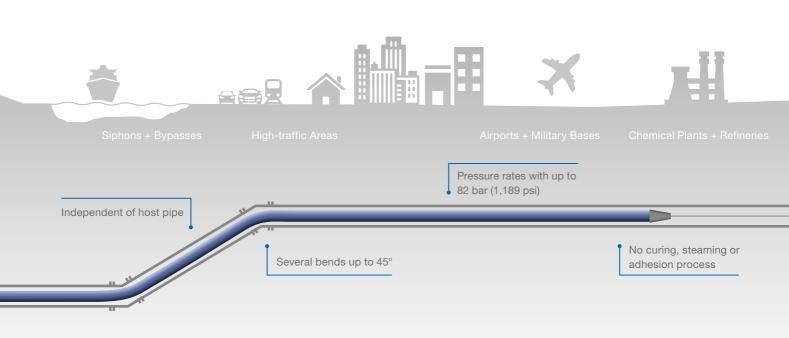

Headquarters in Germany

Branch offices in Australia, China, Canada and the USA Installation Partners worldwide



APPLIED WORLDWIDE

Rely on experience!

Rädlinger has been active in the construction industry for more than 55 years.

Today, Rädlinger primus line GmbH is part of the Werner Rädlinger Group with about 400 employees. With more than 15 years of experience in trenchless pipeline rehabilitation and projects in more than 40 countries, Primus Line® belongs to the leading technologies in the field of trenchless pressure pipe rehabilitation in the world.

Primus Line relies on Germany as production site.

A global partner network and own branches in Australia, China, Canada and the USA grant a fast and smooth project handling on site.



Liner winched into existing host pipe



HOST PIPE

SUITABILITY OF PRIMUS LINE®

Primus Line® is most suitable for a quick and reliable rehabilitation of damaged pressure pipes between DN 150 and DN 500 (6 inches - 20 inches). Thereby, several bends can be traversed while achieving installation lengths of up to 2,500 m (8,200 feet).

REFERENCES

FJORD CROSSING WITH A LENGTH OF 1,240 M

Flensburg, Germany Rehabilitation of inverted siphon DN 300 PE 80 PN 10 Operating pressure: 10 bar Total length: 1,240 m Installed in one section

Primus Line® system: DN 250 PN 15





ASBESTOS CEMENT WATER MAIN REHABILITATION, 10 KM

Reocín, Spain Operating pressure: 7 bar Total length: 10,345 m Installed in 20 sections

Primus Line® system:

DN 250 PN 15 and DN 200 PN 18





ASBESTOS CEMENT WATER MAIN, 1.5 KM IN 53 HOURS

Izmir, Turkey
DN 500 potable water main
Operating pressure: 10 bar
Total length: 1,500 m
Installed in two sections with
600 m and 900 m

Primus Line® system: DN 500 PN 16





CRITICAL RAILWAY CROSSING WITH FOUR 45° BENDS

Penshurst, Australia
Rehabilitation of a cement lined cast iron
pipe DN 225 and DN 300
Operating pressure: 10 bar
Total length: DN 200: 47 m, DN 300: 77 m

Primus Line® system: DN 200 PN 40, DN 300 PN 25





CORRODED SEWER RISING MAIN WITH MULTIPLE 45° BENDS

Lake Windermere, United Kindom Ductile iron DN 300 sewer rising main Operating pressure: 2 bar Total length: 771 m Installed in one section

Primus Line® system: DN 300 PN 12





Lismore, Australia
DN 225 potable water main
Total length: 460 m
Multiple bends of up to 15°
Installed in two sections with
170 m and 290 m

Primus Line® system: DN 203 PN 35





REHABILITATION OF A PVC WATER MAIN THROUGH EXISTING MANHOLES

Sørum, Norway Potable water pipe DN 150 Operating pressure: 10 bar Total length: 165 m One horizontal bend of 22°

Primus Line® system: DN 150 PN 25





RENEWAL OF A STEEL WATER MAIN ACCOMMODATING DILATATION

Passau, Germany

Preventive maintenance of a DN 400 PN 16 steel water main installed in a bridge Operating pressure: 6 bar Total length: 210 m

Primus Line® system: DN 400 PN 18





HIGH PRESSURE WATER MAIN WITH 43.5 BAR OPERATING PRESSURE

Piemont, Italy Renovation of a DN 250 potable water steel pipeline Total length: 750 m

Primus Line® system: DN 250 PN 56





